





RECESSED SOCKETS
Medium Base Lampholder

DRYWALL

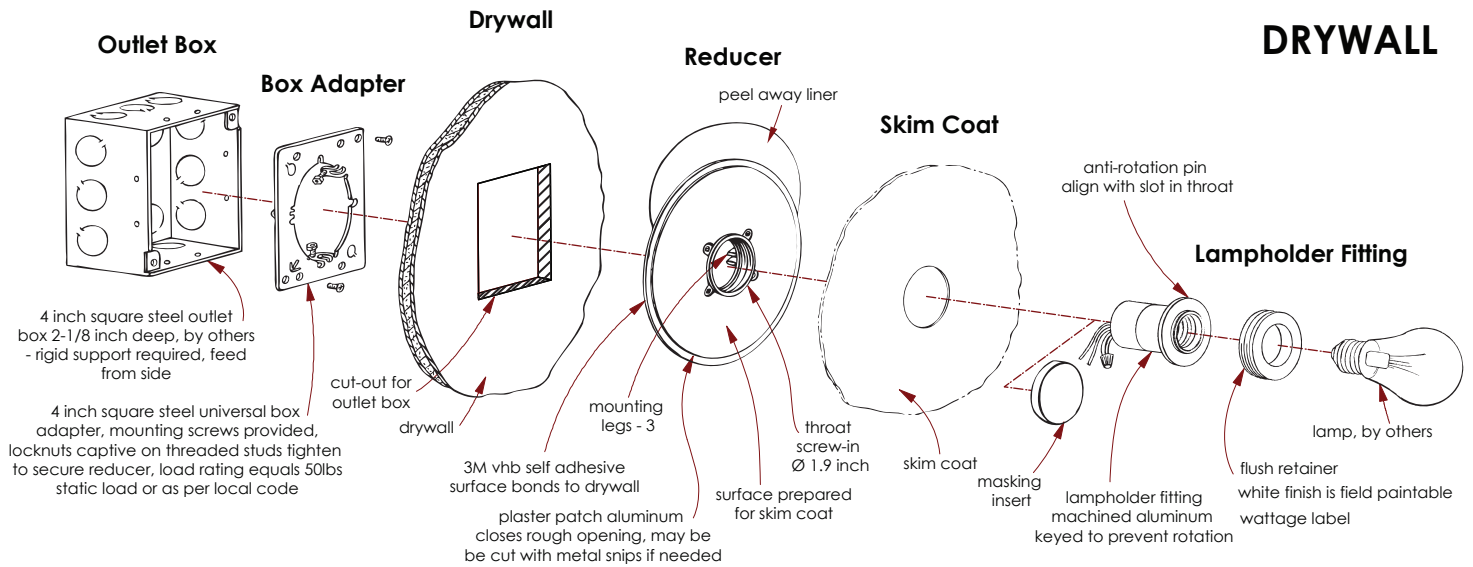


UL LISTED - PATENT NO.

MILLWORK

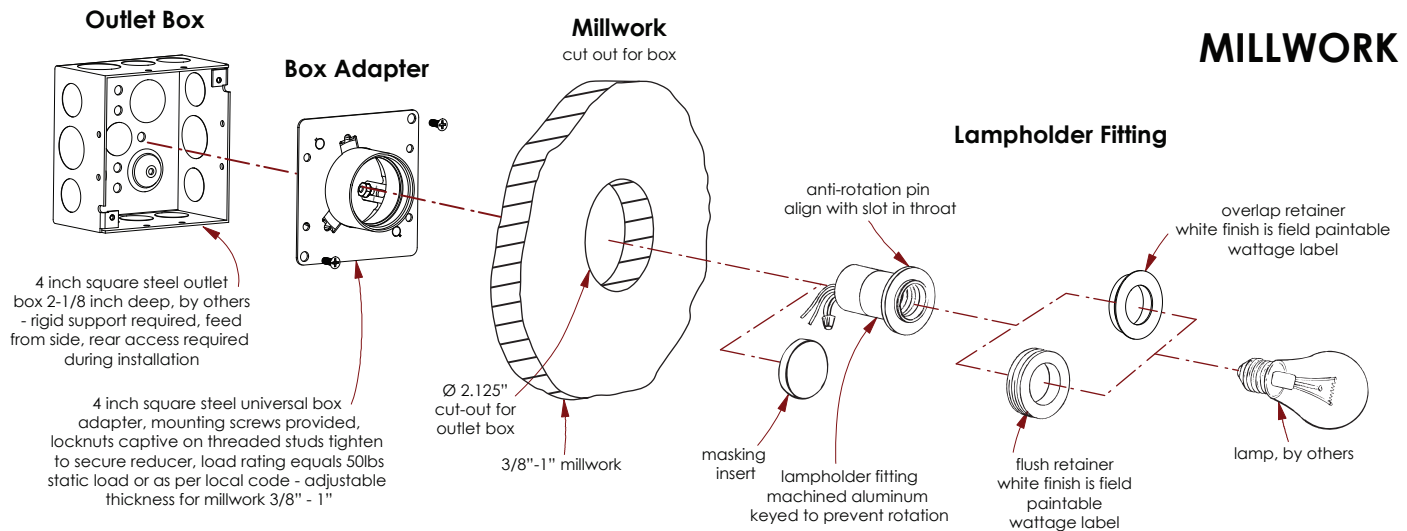

UL LISTED - PATENT NO.

MIRROR

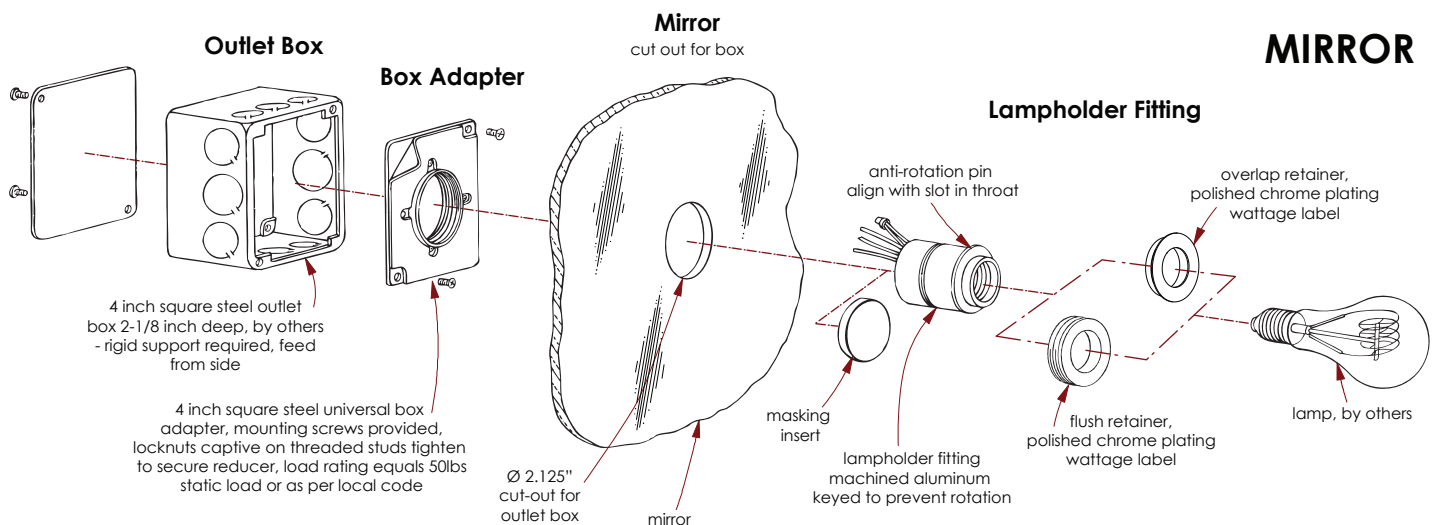

UL LISTED

RECESSED SOCKETS

UL LISTED • DAMP OR DRY LOCATION





RS 1.9

mounting kit

cover

finish

wattage label



1

2

3

4

DW

drywall

- ▶ twist-lock mechanical flush outlet box mounting system
- ▶ rigid support required

AM

architectural millwork

- ▶ twist-lock mechanical flush outlet box mounting system
- ▶ rear access required for installation

MR

¼" mirror


- ▶ unique management system enables patterns

Contact factory for:

- concrete kits
- grid/ceiling tile kits

FD


flush drywall



1.95" diameter cover

FM


flush millwork or mirror



2.1" diameter cover

OM

overlap millwork or mirror



2.25" diameter cover

WT

white low gloss baked enamel

6W

BK

black low gloss baked enamel

9W

SB

statuary bronze low gloss baked enamel

13W

SBP

solid brass patina

20W

SBN

solid brass natural

40W

CC

custom color baked enamel

60W

CL

custom labels available