

MP2.2-Basic-AM-XOB14

- ① CCT °K ② beam ③ light control ④ finish ⑤ options


Electrical Specifications

class 2 constant current DC power supply required
 30.0 - 36.5V DC @ 550mA 17.7W BY OTHERS
 each fixture requires its own, dedicated driver
 "daisy chaining" fixtures is not permissible

**** INQUIRE FOR INTEGRAL DRIVERS ****

feed from side →
 wiring and splices are accessible from the room after installation - rear access is only required during installation

MP2.2 Basic Millwork

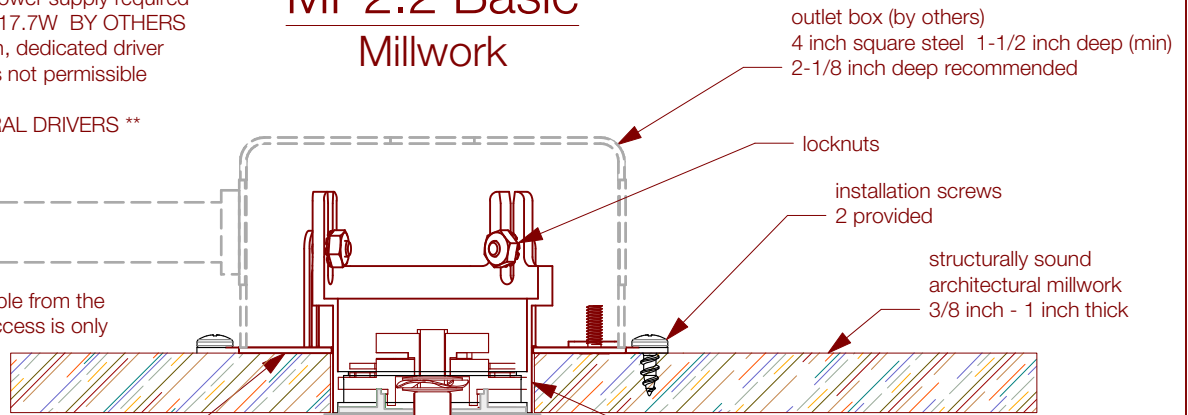

Flush - Architectural Millwork Mounting Kit
 BK1.9-TL-AM no.88101266
 one required at each mounting point

LED

Xicato XOB1495XX50X3621
 LES 14mm 95CRI
 source lumens 2118 lm @ 550mA 3000K
 efficacy 126 lm/W 17.7W

4 Finishes


Paint - low gloss baked enamel
 WH white
 BK black
 BZ statuary bronze
 CP custom paint

Brass

hand worked metal and patinas
 BB burnished brass
 BP dark bronze patina
 VP variegated light patina
 VB vintage brass
 CB custom brass
 ** sealer request - add ** to code


5 Construction Options

L" stem length - specify length in inches
 A° ceiling slope fitting - specify angle in degrees
 90 90° tilt
 WL wet location
 WW wall washer
 FC flush cover



mounting screws provided

8-32 box screws provided

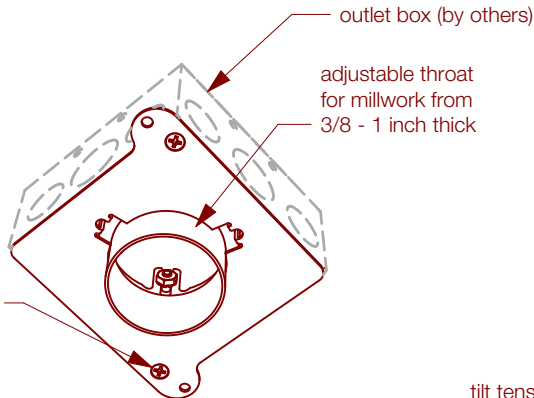

1 CCT °K

2700	3000	3500	4000
------	------	------	------

2

Beam reflector + solite lens


Beam	reflector	+ solite lens		
N narrow	26.3°	1300.6 lm	4786 cbcp	
M medium	34.2°	1280.6 lm	3355 cbcp	
W wide	44.5°	1145.8 lm	1870 cbcp	

photometry and IES files available

3

Light Control

HX Hexcel louver
 LS Linear spread lens - 55°
 AH 2 inch dia. accessories holder

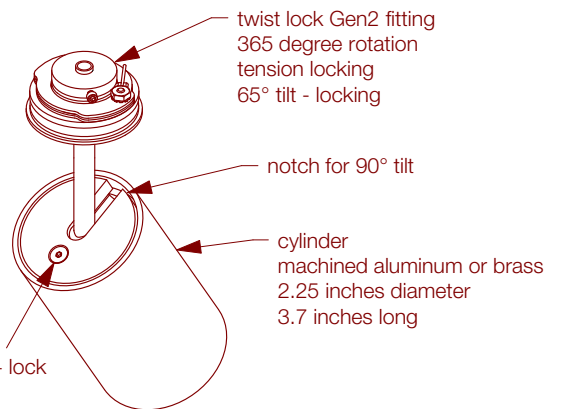

Patent No. 7902459



Title 24 JA8 Approved

damp or dry locations - horizontal or vertical mounting


MP2.2 Photometry

Xicato XOB14 95 CRI

14mm LES 550 mA reflector + solite lens


narrow - 26.3° 1300.6 lm 4786 cbcp
delivered

LLIA002475-003

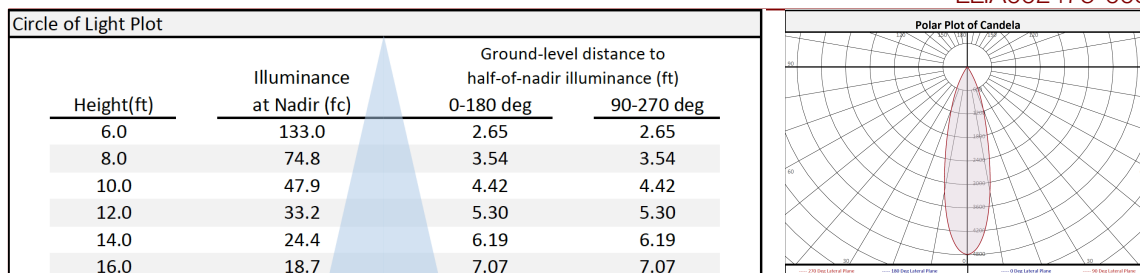


medium - 34.2° 1280.6 lm 3355 cbcp
delivered

LLIA001976-002

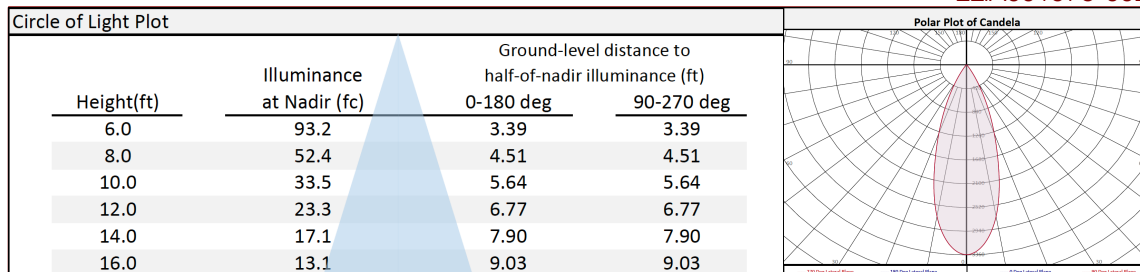

wide - 44.5° 1145.8 lm 1870 cbcp
delivered

LLIA001976-001

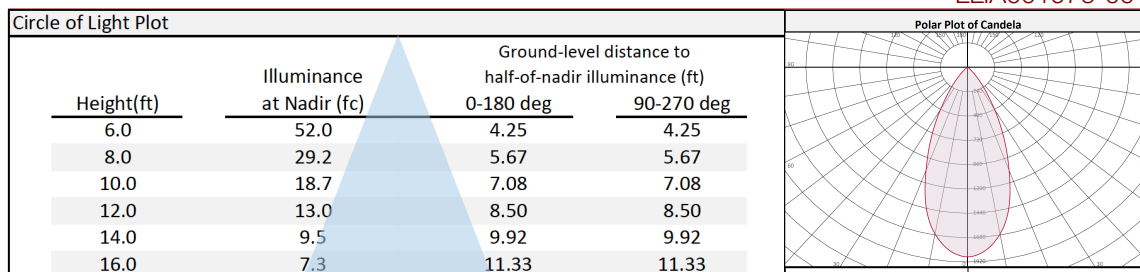

spot = <20° narrow = 20°-30° medium = 30°-40° wide = >40°